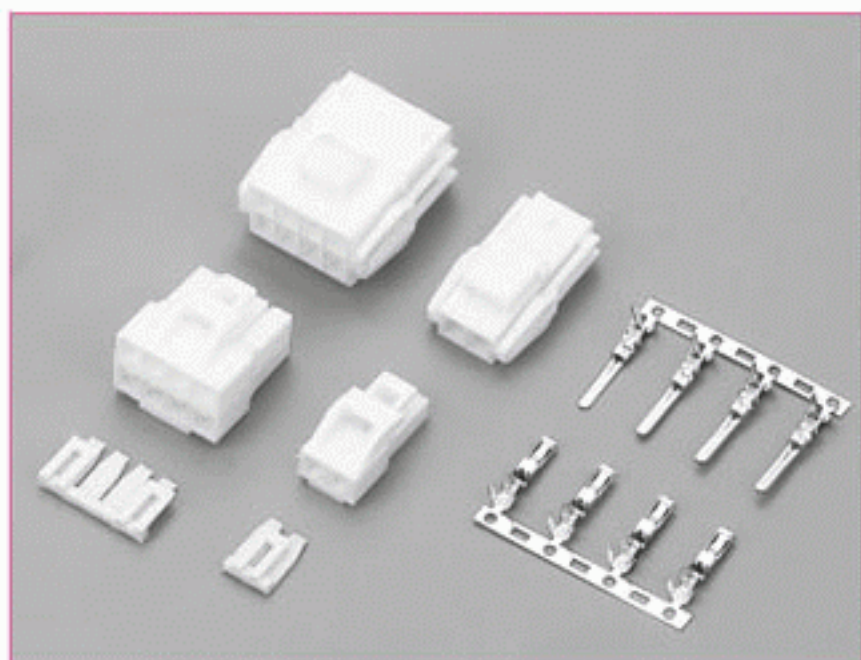


(YL)型条形连接器

(YL) Pressure Welding Bar Connector

间距 (Pitch) : 4.5mm (.177")




■ 技术参数 SPECIFICATIONS


- 线数 (Poles) : 1、2、3、4、6、8、9、12、15、16
- 适用线规 (Applicable wires) : AWG28#~18#
- 适应基板厚度 (Applicable PC board thickness) : 0.7~2.0mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 10A Max
- 接触电阻 (Contact resistance) : ≤0.015Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 1500V.Ac/1min
- 材料 (Material) :
 - 插头 (Plug housing) : 尼龙 (PA66) UL94V-0
 - 插座 (Receptacle housing) : 尼龙 (PA66) UL94V-0
 - 插片 (Retainer) : 尼龙 (PA66) UL94V-2
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)
 - 黄铜 (Brass Tin/plated)

端子 TERMINAL

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm
	mm ²	AWG#	
HX45004-01PT	0.09~0.3	28~22	0.9~1.7
HX45005-01RT	0.09~0.3	28~22	0.9~1.7
HX45004-21PT	0.3~0.75	22~18	1.7~3.0
HX45005-21RT	0.3~0.75	22~18	1.7~3.0




■ 安装尺寸 MOUNTING MEASUREMENT

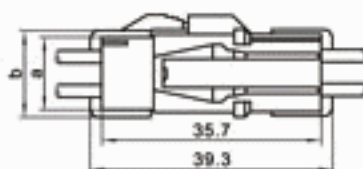


型号 Type	线数 Poles	尺寸 Dimensions W (mm)	
		a	b
单排	2、3	9.5	10.8
2 排	4、6、8、12、16	15.3	16.6
3 排	9、12、15	20.5	21.8

线数 Poles	型号 Type	适应基板厚度(Applicable PC board thickness)(mm)							
		0.7~2.0		0.7~0.8		0.9~1.3		1.4~2.0	
		A	B	C	D	E	D	E	D E
2	HX45005-2R	10.7	16.8	7.1	4.4	1.3	5.0	1.0	5.6 0.7
3	HX45005-3R	15.3	21.3	7.1	4.4	1.3	5.0	1.0	5.6 0.7
4	HX45005-4R	10.7	16.8	12.9	7.1	2.85	7.7	2.55	8.3 2.25
6	HX45005-6R	15.3	21.3	12.9	7.1	2.85	7.7	2.55	8.3 2.25
8	HX45005-8R	19.8	25.8	12.9	7.1	2.85	7.7	2.55	8.3 2.25
9	HX45005-9R	15.3	21.3	18.2	7.1	5.55	7.7	5.25	8.3 4.95
12 (3×4)	HX45005-12R	19.8	25.8	18.2	7.1	5.55	7.7	5.25	8.3 4.95
12 (2×6)	HX45005-12RN	28.9	34.8	12.9	7.1	2.85	7.7	2.55	8.3 2.25
15	HX45005-15R	24.4	30.3	18.2	7.1	5.55	7.7	5.25	8.3 4.95
16	HX45005-16R	37.9	43.8	12.9	7.1	2.85	7.7	2.55	8.3 2.25

HX45004-PT (YL)



HX45005-RT (YL)

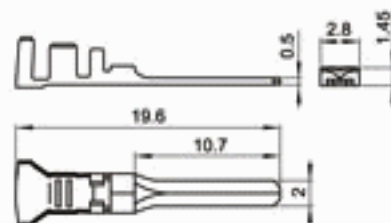

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)	插片 (Retainer)
1	300V	7A (10A)	HX45004-1P (YL) 	HX45005-1RF (YL) 	HX45004-1S (YL)
			HX45004-2P (YL) 	HX45005-2R (YL) 	HX45004-2S (YL)

(YL)型条形连接器**(YL) Pressure Welding Bar Connector****间距 (Pitch) : 4.5mm (.177")**

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)	插片 (Retainer)
2	300V	7A (10A)	HX45004-2P (YL) 	HX45005-2RF (YL) 	HX45004-2S (YL)
3	300V	6A (9A)	HX45004-3P (YL) 	HX45005-3R (YL) 	HX45004-3S (YL)
				HX45005-3RF (YL) 	
4	300V	5A (8A)	HX45004-4P (YL) 	HX45005-4R (YL) 	HX45004-2S (YL)








(YL) 型条形连接器**(YL) Pressure Welding Bar Connector**

间距 (Pitch) : 4.5mm (.177")

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)	插片 (Retainer)
6	300V	5A (8A)	HX45004-6P (YL) 	HX45005-6R (YL) 	HX45004-3S (YL)
8	300V	4A (6A)	HX45004-8P (YL) 	HX45005-8R (YL) 	HX45004-4S (YL)
9	300V	4A (6A)	HX45004-9P (YL) 	HX45005-9R (YL) 	—
12	300V	3A (6A)	HX45004-12P (YL) 	HX45005-12R (YL) 	—

(YL) 型条形连接器**(YL) Pressure Welding Bar Connector**

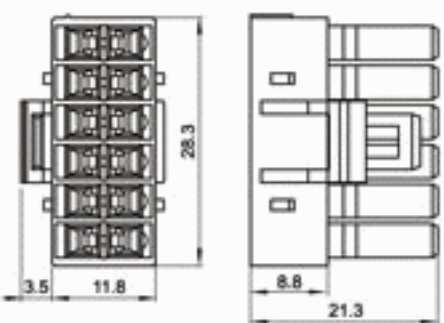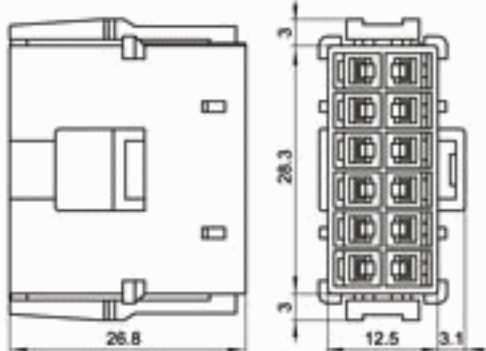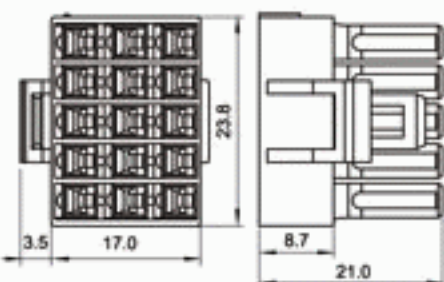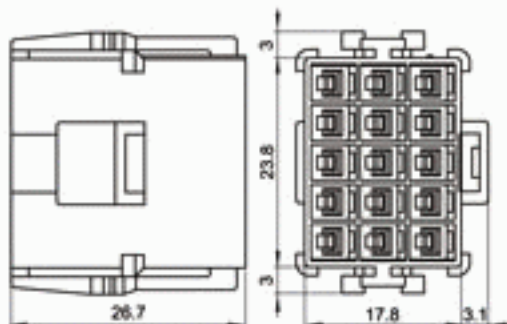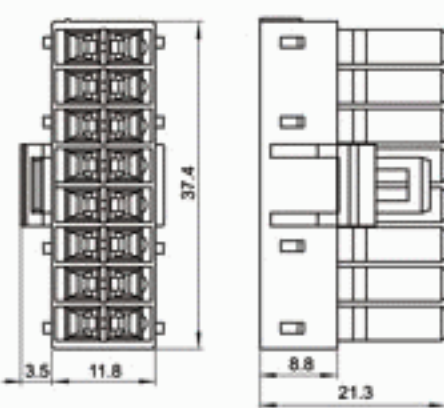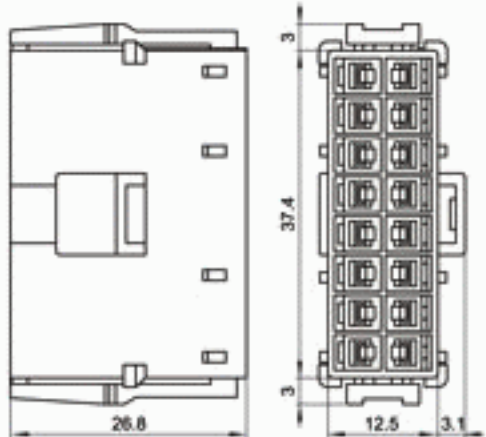间距 (Pitch) : 4.5mm (.177")

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (eceptacle Housing)	插片 (Retainer)
12	300V	3A (6A)	HX45004-12PN (YL) 	HX45005-12RN (YL) 	HX45004-6S (YL) 
			HX45004-15P (YL) 	HX45005-15R (YL) 	
16	300V	3A (5A)	HX45004-16P (YL) 	HX45005-16R (YL) 	HX45004-8S (YL) 