


■ 技术参数 SPECIFICATIONS


- 线数 (Poles) : 2、3、4、6、9、12、15
- 适用线规 (Applicable wires) : AWG24#~18#
- 适应基板厚度 (Applicable PC board thickness) : 1.6~20mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 10A max
- 接触电阻 (Contact resistance) : $\leq 0.015\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1500V.Ac/1min
- 材料 (Material) :
 - 插头 (Plug housing) : 尼龙 (PA66) UL94V-2(0)
 - 插座 (Receptacle housing) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

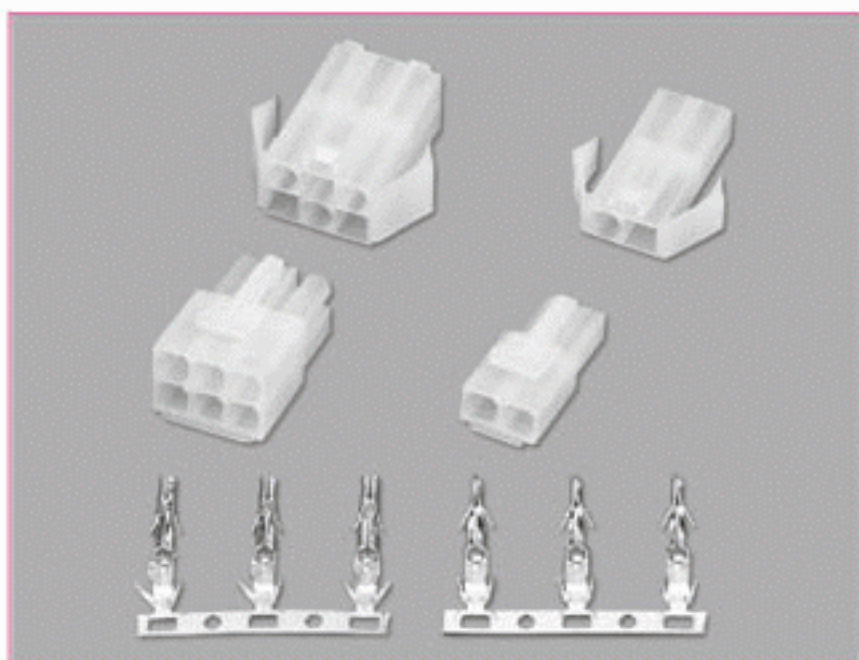

端子 TERMINAL (CL014/OTP)


型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm
	mm ²	AWG #	
HX45000-PT	0.2~0.75	24~18	1.5~3.0
HX45001-RT	0.2~0.75	24~18	1.5~3.0

■ 安装尺寸 MOUNTING MEASUREMENT




线数 Poles	型号 Type	尺寸 Dimensions (mm)		
		A	B	C
2	HX45007-2R	15.0	6.0	6.85
3	HX45007-3R	19.7	6.0	6.85
4	HX45007-4R	24.2	6.0	6.85
6	HX45007-6R	19.7	10.2	11.1
9	HX45007-9R	19.7	14.8	15.7
12	HX45007-12R	24.2	14.8	15.7
15	HX45007-15R	28.7	14.8	15.7

HX45000-PT (CL014/OTP)



HX45001-RT (CL014/OTP)



线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)
2	300V	10A	HX45006-2P (610024) 	HX45007-2R (620023)
			HX45007-2RF (620440) 	
3	300V	10A	HX45006-3P (610026) 	HX45007-3R (620025)

(小型EL)型条形连接器**(Small Type EL) Pressure Welding Bar Connector****间距 (Pitch) : 4.5mm (.177")**

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)
4	300V	10A	HX45006-4P (610028) 	HX45007-4R (620027)
6	300V	8A	HX45006-6P (610030) 	HX45007-6R (620029)
9	300V	6A	HX45006-9P (610032) 	HX45007-9R (620031)
12	300V	6A	HX45006-12P (610034) 	HX45007-12R (620033)
15	300V	6A	HX45006-15P (610036) 	HX45007-15R (620035)